

EPSON®



LW-PX300

Cost-Effective • Intuitive • User-Friendly



6-18 mm



LW-PX300



The LW-PX300 is a low-cost, compact wire-marking, bar code, and general-identification label printer for creating custom and compliant labels up to 3/4” (18mm) wide. Identify wires and equipment, organize tool cribs and storage bins, asset tags, and more.

Perfect for the home, office and small business, this portable, easy-to-use label maker offers extraordinary flexibility and durability at an affordable price. With the LW-PX300, you can print on various materials such as magnetic tape, heat shrink tube, and super strong adhesive tape.

SIMPLE, LIGHTWEIGHT, AND COMPACT




The LW-PX300 is not that much larger than a mobile phone. Perfect for handheld use.

BAR CODES



Easily create select bar code styles using the LW-PX300.

CONVENIENT PRINTING



Press print once and print multiple copies for bigger projects. Easily save and store labels to return and print at a later time.

LIFETIME WARRANTY



Register your printer with us when you receive it, and you’re covered for as long as you own it. **100% Covered. Always. You break it. We replace it. For life.**

And this warranty isn’t some add-on service plan available at an additional cost. Instead, your warranty comes with your printer, so you’ll never have to worry about life if it happens to your printer.

AVAILABLE KITS



SKU: LW-PX300

- Kit Includes:**
- LW-PX300 Printer
 - ½” Black on White VINYL Cartridge (212VTBWPX)
 - User Guide



SKU: LW-PX300VP

- Kit Includes:**
- LW-PX300 Printer
 - ½” Black on White VINYL Cartridge (212VTBWPX)
 - AC Adapter
 - Rubber Guard
 - Heavy-Duty Plastic Case

SPECIFICATIONS

PRINTER

Technology: Thermal Transfer
Tape Width: 1/4” - 3/4” (6-18mm)
Heat Shrink Tube Width: 1/8” - 3/16” (3-5mm)
Resolution: 180dpi
Printer Head Width: 9.1mm
Max Print Speed: 6mm/sec (with AC Adapter)

HARDWARE

Cutter: Manual full cut
Replaceable Cutter: N/A
LCD: 130x48 back-lit monochrome
Keyboard: QWERTY
Internal Memory: Up to 50 files
Drop-Stop & Pick-n-print: N/A
Detection: Cover open, battery level, tape detection (size)

CONNECTIVITY

Interface: N/A
Compatible PC Software: N/A
Compatible Mac Software: N/A
Compatible Apps (iOS 9.0 or later Android 5.0 or later): N/A

POWER INFORMATION

AC Adapter: Yes *(included in LW-PX300VP kit, not included in LW-PX300 kit)*
Battery: 6 AA Batteries *(batteries not included)*

PRINTER SETTINGS & FEATURES

Repeat Printing: Yes
Auto Increment: Yes
Number Serialization: Up to 1 digit
Label Transfer from PC Software: N/A
Store and Print Images: N/A
Mirror Printing: Yes
Mix-Length: N/A
Peel Guard Corner Rounder: N/A
Minimum Margins: 10mm
Vertical Printing: Yes
Cable Wrap: Yes
Flag: Yes
Patch Panel: N/A
Punch Block: N/A
Faceplate: N/A
Block 66: N/A
Barcodes: 8 formats
QR Code: N/A
Symbols: 780
Length: Auto or custom
of Fonts: 14
Frames: 89
Table: N/A


See next page for tape compatibility >
Check LabelWorks.Epson.com for product updates, information, and current pricing



TAPE COMPATIBILITY: LW-PX300

STANDARD INDUSTRIAL POLYESTER TAPE - 30ft (9m)			
IMPRINT	TAPE	WIDTH	PART NUMBER
Black	Clear	1/4" (6mm)	206BCPX†
		3/8" (9mm)	209BCPX†
		1/2" (12mm)	212BCPX†
		3/4" (18mm)	218BCPX†
	Translucent Matte (limited supply)	3/4" (18mm)	218BTMPX
	White	1/4" (6mm)	206BWPX†
		3/8" (9mm)	209BWPX**
		1/2" (12mm)	212BWPX**
		3/4" (18mm)	218BWPX**
	Yellow	1/4" (6mm)	206BYPX†
		3/8" (9mm)	209BYPX**
		1/2" (12mm)	212BYPX**
		3/4" (18mm)	218BYPX**†
	Green	1/4" (6mm)	206BGPX†
		3/8" (9mm)	209BGPX†
		1/2" (12mm)	212BGPX†
		3/4" (18mm)	218BGPX†
	Blue	1/4" (6mm)	206BBPX†
		3/8" (9mm)	209BBPX†
		1/2" (12mm)	212BBPX†
		3/4" (18mm)	218BBPX†
	Red	1/4" (6mm)	206BRPX†
		3/8" (9mm)	209BRPX†
		1/2" (12mm)	212BRPX†
		3/4" (18mm)	218BRPX†
	Orange	1/2" (12mm)	212BOPX
		3/4" (18mm)	218BOPX
	White Removable	1/2" (12mm)	212RAPX†
	Purple	3/4" (18mm)	218BVPX
	Matte Silver	3/8" (9mm)	209SMPX†
		1/2" (12mm)	212SMPX†
		3/4" (18mm)	218SMPX†

STANDARD INDUSTRIAL POLYESTER TAPE - 30ft (9m)			
IMPRINT	TAPE	WIDTH	PART NUMBER
White	Black	1/4" (6mm)	206WBPX†
		3/8" (9mm)	209WBPX†
		1/2" (12mm)	212WBPX†
		3/4" (18mm)	218WBPX†
	Vivid Red	1/2" (12mm)	212WRPX
		3/4" (18mm)	218WRPX
	Vivid Green	1/2" (12mm)	212WGPX
		3/4" (18mm)	218WGPX
	Vivid Blue	1/2" (12mm)	212WLPX
		3/4" (18mm)	218WLPX
	Clear	1/2" (12mm)	212WCPX†
		3/4" (18mm)	218WCPX†
Red	White	1/2" (12mm)	212RWPX†

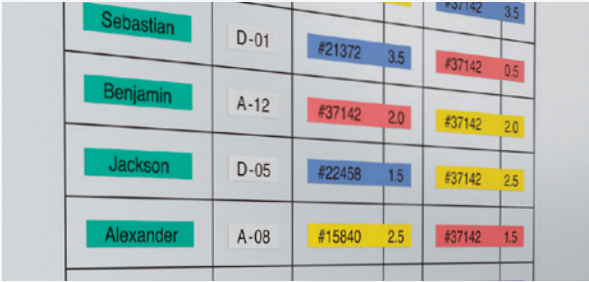

STRONG ADHESIVE POLYESTER TAPE- 30ft (9m)			
IMPRINT	TAPE	WIDTH	PART NUMBER
Black	White	3/8" (9mm)	209BWPX†
		1/2" (12mm)	212BWPX†
		3/4" (18mm)	218BWPX†
	Yellow	3/8" (9mm)	209BYPX†
		1/2" (12mm)	212BYPX†
		3/4" (18mm)	218BYPX†
Gold	Clear	1/2" (12mm)	212GCPX†
	Black	1/2" (12mm)	212GBPX
FLUORESCENT POLYESTER TAPE- 30ft (9m)			
Black	Fluorescent Red	3/4" (18mm)	218FRPX
	Fluorescent Pink		218FPPX
	Fluorescent Orange		218FOPX†
	Fluorescent Yellow		218FYPX†
	Fluorescent Green		218FGPX†
VINYL TAPE - 22.9ft (7m)			
Black	White	1/2" (12mm)	212VTBWPX**
		3/4" (18mm)	218VTBWPX**
	Yellow	1/2" (12mm)	212VTBYPX**
		3/4" (18mm)	218VTBYPX**
EXTRA TOUGH NYLON TAPE - 19ft (5.8m)			
Black	White	1/2" (12mm)	212NYLBWPX†
		3/4" (18mm)	218NYLBWPX†

It is recommended to cut nylon tape using scissors to prolong the life of your printer's built-in cutter.

MAGNETIC TAPE - 4.9ft (1.5m)			
IMPRINT	TAPE	WIDTH	PART NUMBER
Black	White	1/2" (12mm)	212MTBWPX-4.9
		3/4" (18mm)	218MTBWPX-4.9
	Yellow	1/2" (12mm)	212MTBYPX-4.9
		3/4" (18mm)	218MTBYPX-4.9
	Red	1/2" (12mm)	212MTBRPX-4.9
		3/4" (18mm)	218MTBRPX-4.9
	Blue	1/2" (12mm)	212MTBBPX-4.9
		3/4" (18mm)	218MTBBPX-4.9
	Green	1/2" (12mm)	212MTBGPX-4.9
		3/4" (18mm)	218MTBGPX-4.9

It is recommended to cut magnetic tape using scissors to prolong the life of your printer's built-in cutter.

HEAT SHRINK TUBE - 98in (2.4m)					
IMPRINT	TAPE	NOMINAL DIAMETER	AWG	SHRINK RATIO	PART NUMBER
Black	Red	3/16" (4mm)	8-12	2:1	205STBRPX
	Yellow	1/8" (3mm)	16-22	3:1	203YLBYPX
		3/16" (4mm)	8-12	2:1	205STBYPX
	White	1/8" (3mm)	16-22	3:1	203YLBWPX
		3/16" (4mm)	8-12	2:1	205STBWPX
	Blue	3/16" (4mm)	10-18	3:1	205YLBBPX
White	Black	3/16" (4mm)	8-12	2:1	205STWBPX

Compliance Standards: UL Standard 224 (Related Temperature: 125° C, Rated Voltage: 300V, Flame Resistance Grade VW-1). It is recommended to cut heat shrink tube using scissors to prolong the life of your printer's built-in cutter.

DESIGNER COLLECTION	
Visit labelworks.epson.com/for-home/supplies.html to view our Designer Collection	

* INDICATES THAT SUPPLY IS ALSO AVAILABLE IN STANDARD CARTRIDGES
** INDICATES THAT SUPPLY IS ALSO AVAILABLE IN BULK ROLL (BULK ONLY COMPATIBLE WITH Z PRINTERS)
† INDICATES THAT SUPPLY HAS SPLIT-BACK LINING



GET IN TOUCH



Phone
+1 800.458.3430
M-F 8am-4pm CST



Fax
+1 888.865.2235



Email
shop@labelworks.epson.com



Web
labelworks.epson.com



Address
PO Box 309, 370 SMC Drive
Somerset, WI 54025

FOLLOW US



EPSON®